


ALFOMBRA MODULAR

COLECCIÓN GRANITE

TUNTEX

DESCRIPCIÓN

Alfombra hecha en un 100% por **fibra Nexlon**, una fibra de nylon de primera calidad. No se decolora fácilmente por la luz solar o por la limpieza. Posee una elasticidad superior que permite conservar su forma con el paso del tiempo. Compuesta por una mezcla de grises oscuros cálidos y fríos, la hacen una colección muy auténtica gracias a los tonos crudos que ofrece.

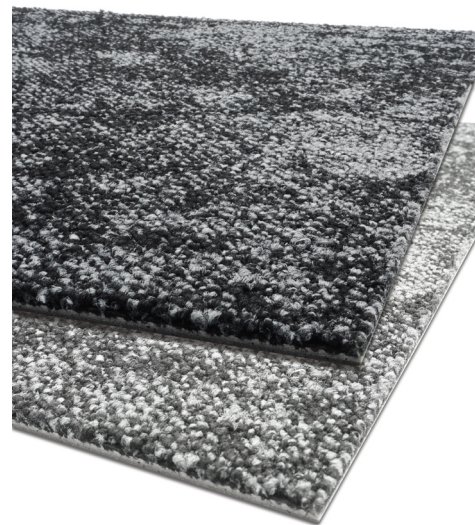

COLOR & TEXTURA




Coin
T66504




Charcoal
T66507


SUGERENCIA DE INSTALACIÓN



Cuarto de vuelta,
Quarter Turn



Sillar



Ladrillo, Brick

VENTAJAS



GRAN DURABILIDAD



AMIGABLE CON EL
MEDIO AMBIENTE



TECNOLOGÍA DE FIBRA NEXLON



FÁCIL REEMPLAZO






FÁCIL INSTALACIÓN



VERSATILIDAD EN DISEÑO

CARACTERÍSTICAS TÉCNICAS

SPECIFICATIONS	
Product Name	T665 "Granite"
Dye Method	Solution Dyed / Non-Woven Backing
Construction	Multi Hi / Lo Loop
Pile Fibre	Nexlon Soil & Stain Treatment
Foot Traffic	Heavy
Protective Treatments	Recyclable TUNTEX Commercial Duraback
Primary Backing	1/10
Secondary Backing	+/-9.0
Gauge	550gm/m ² (16oz/yd ²)
Stitches per inch	2.50 - 5.00mm (+/- 0.5mm)
Pile Height	5.5 - 3.0mm
Pile Weight	550gm/m ² (16oz/yd ²)
Pile Thickness	2.50 - 5.00mm (+/- 0.5mm)
Total Thickness	7.20mm (+/-0.5mm)
Total Weight	Approximately 600 gm/m ² (+/-5%)
Tile Size	500mm x 500mm
Electrostatic Propensity	≤ 2.0 KV (GB/T 18044-2008)
Stain Resistance	Stainshield Treatment: StainShield™
Soil Resistance	Soil Guard Treatment: SoilGuard™

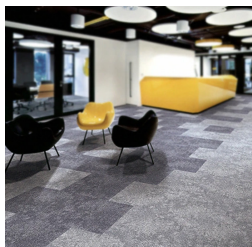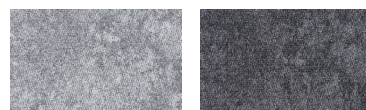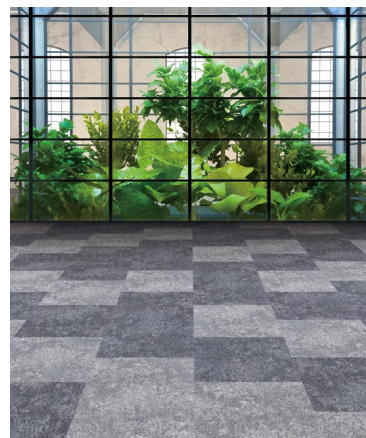

PERFORMANCE SPECIFICATIONS

ASTM E648	Class 1 (Radiant Panel)
ASTM E662	Less than 450 (Smoke Density)
AATCC 134	Less than 3.0KV (Electrostatic Propensity)
ASTM D3936	Greater than 3lbs/ inch (Delamination)
ASTM D1335	Greater than 8lbs (Tuft Bind)
AATCC 16	Greater than 4 (Color Fastness to Light)
ASTM D7570	Less than 0.02% (Dimension Stability)

ENVIRONMENTAL CERTIFICATION

The Carpet & Rug Institute	U.S Green Label Plus Certificate GLP7116
Singapore Green Building Council	SGBP 2018-1463 (Leader)
Singapore Environmental Council	039-028-2607
Health Product Declaration	Third Party, Green Circle Certified (6H3-2763)
Environment Product Declaration	Third Party, UL certified (4787594440.102.1)
CE Marking (EN14041)	Third Party Certified
Quality Management System	Third Party Certified: ISO 9001
Environmental Management System	Third Party Certified: ISO 14001